
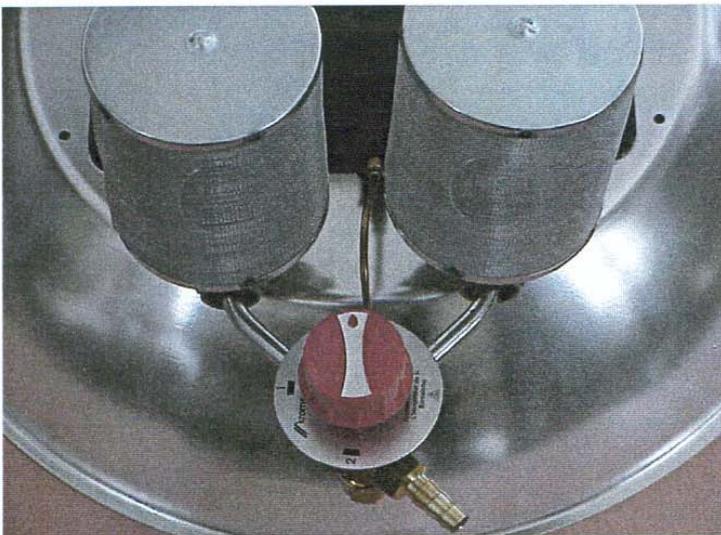


INFRA-RED HEATERS TYPE SAK

- There is one Kromschroeder Infra-red **SAK heater** proper for every breeding, with different capacities.
- Long-lasting ceramic plates.
- Standard Kromschroeder Infra-red **SAK heaters** are designed to use Propane gas.
- Kromschroeder Infra-red **SAK heaters** can be managed individually or centrally (by means of our temperature **control panel SAK C**). You will get the right temperature for every breeding.

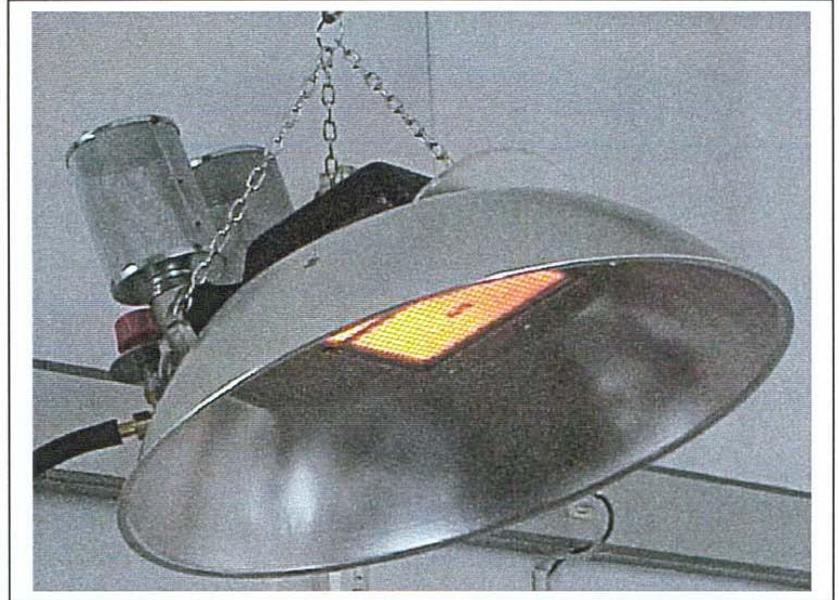


- A very strong heater
- Heater canopy is made of anodised aluminium to achieve perfect heat refraction and avoid corrosion.
- Equipped with anti-dust filter
- Manual ignition. With thermoelectric safety valve.
- Easy to install
- Easy to maintain
- Easy to use

● Kromschroeder Infra-red **SAK heaters** allow to adjust the heat output within a wide scale.

● Kromschroeder Infra-red heater type **SAK 4/4** is equipped with two individual ceramic plates with two heat intensity levels.

● CE approved

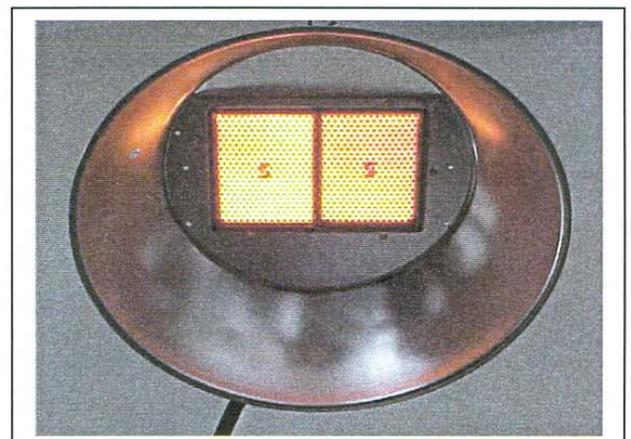

Infra-red SAK heaters

Adjustable pressure. Temperature control: Manual or automatic adjustment

Model Numbers	1/1 - AC	2/4 - C	4/5 - C	4/4 - C
Number of ceramic plates	1	1	1	2
Type of fuel	Propane	Propane	Propane	Propane
Fuel Consumption (g/h)	32 - 54	54 - 97	92 - 164	92 - 328
Inlet Gas Supply Pressure				
mbar	50 to 150	50 to 150	50 to 150	50 to 150
psi	0,72 to 2,17	0,72 to 2,17	0,72 to 2,17	0,72 to 2,17
mmwc	509,7 to 1529,3	509,7 to 1529,3	509,7 to 1529,3	509,7 to 1529,3
Heat output - Capacity				
kW	0,45 to 0,75	0,75 to 1,35	1,28 to 2,29	1,28 to 4,58
Btu	1535 to 2559	2559 to 4606	4367 to 7814	4367 to 15627
Kcal	387 to 645	645 to 1160	1100 to 1969	1100 to 3940
Installation Height				
m	0,6	0,8	1,1	1,6
Weight				
Kg	1,5 (two-units package)	2,2 (two-units package)	1,7	3,3

Control Panel SAK C

Centralised thermostatic adjustment (sensor at the end of a 8 meters long tube)

Maximum quantity of heaters per Control Panel	110	62	36	18
---	-----	----	----	----

SAK pre-set gas pressure heaters. Manual control

Model Numbers	1/1 - A	2/4	4/5	4/4
Fuel Consumption (g/h)	46	78	150	150 or 300
Inlet Gas Supply Pressure	mbar	37 or 50	37 or 50	37 or 50
	psi	0,53 or 0,72	0,53 or 0,72	0,53 or 0,72
	mmwc	378 or 510	378 or 510	378 or 510
Heat output (capacity)	KW	0,64	1,09	2,09
	Btu	2184	3719	7731
	Kcal	550	937	1797



We reserve the right to make technical changes in order to improve our products without prior notice

Santa Eulalia 213, Hospitalet, Barcelona, Spain
 Tel: + 34 934 329 600 // Fax: + 34 934 321 819
www.kromschroeder.es // info@kromschroeder.es